




1. Professional Series Refrigerators and Freezers
2. Commercial Series Refrigerators and Freezers
3. Walk-In Coolers
4. Cooler and Freezer Shelving

Hoshizaki

Hoshizaki refrigerators and freezers are produced in one of the industry's most automated production plants, utilizing the latest state-of-the-art technology. Every refrigerator and freezer is run-tested at the factory prior to shipment, and has a 3 year warranty.

Professional Series

The professional series has finest quality models for ultimate performance.

- All SSE refrigerators are Energy Star qualified
- Interior cabinet construction is stainless steel
- Uniform cabinet temperature is achieved with evaporator above the food zone
- EverCheck control center digital and audio alarms  for 10 conditions
- Innovative air flow design eliminates "hot spots" and achieves a more uniform cabinet temperature
- Dual door frame heaters
- Electronic refrigeration controls
- Refrigerators with variable speed compressors and adaptive control technology
- Field reversible doors, factory installed casters are standard

Commercial Series

The commercial series has reliable value models that provide proven benefits.

- All models are Energy Star qualified, except CF3B-FS and CF3B-HS
- Interior cabinet construction is heavy duty, one-piece, vacuum formed ABS seamless liner
- Uniform cabinet temperature is achieved with evaporator inside the cabinet
- Solid state refrigeration controls, LED display and audio alarms for high and low temp
- Constant air movement circulating top to bottom at each individual shelf level, surrounding food at the right temperature
- Heavy duty, epoxy coated wire shelving and stainless steel shelf supports sustain maximum loads
- Low height units, field reversible doors, factory installed casters are standard



Hoshizaki reach-in



Hoshizaki pass-thru



Hoshizaki undercounter



Hoshizaki prep table



Hoshizaki worktop



U.S. Cooler walk-in



Professional Series Reach-In Refrigerators and Freezers

Features

- Stainless steel interior and exterior
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil
- Ducted air distribution system for uniform cabinet temperature that eliminates “hot spots”
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high-grade 300 Series stainless steel
- Variable speed compressor



All units are 33.6" deep, (58.5" deep with doors open at 90°), and 82.5" high including 4" casters. (See chart for widths.) Optional 6" legs with stainless steel bullet feet. Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15.0 (HACR: 20.0 for FH2-SSB and FH2-SSB-HD). Ambient temperature range: 45°-100° F. Refrigerant for refrigerators and freezers: R-404A. Refrigerator control set point range: +36° to +50° F. Freezer control set point range: -10° to +25° F.

*Energy Star qualified.



RH1-SSE-HS
FH1-SSB-HD

RH2-SSE-HS
FH2-SSB-HD

RH3-SSE-HS

	Refrigerators						Freezers			
	RH1-SSE-FS*	RH1-SSE-HS*	RH2-SSE-FS*	RH2-SSE-HS*	RH3-SSE-FS*	RH3-SSE-HS*	FH1-SSB	FH1-SSB-HD	FH2-SSB*	FH2-SSB-HD*
Interior volume (CF)	22.3 ft ³	22.3 ft ³	48.0 ft ³	48.0 ft ³	74.0 ft ³	74.0 ft ³	22.3 ft ³	22.3 ft ³	48.0 ft ³	48.0 ft ³
Width	27.5"	27.5"	55"	55"	82.5"	82.5"	27.5"	27.5"	55"	55"
Depth with door open	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
Interior door opening W	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior door opening H	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable shelves	3	3	6	6	9	9	3	3	6	6
Center shelves	N/A	N/A	3	3	6	6	N/A	N/A	3	3
Shelf size, W x D	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"
Amperage	4.3	4.3	6.0	6.0	7.1	7.1	11.0	11.0	15.5	15.5
Energy (kwh/day)	2.1	1.9	3.4	3.9	4.3	4.3	9.03	9.7	15.9	17.4
Heat rejection (BTU/hr)	582	582	938	938	1139	1139	2100	2100	3415	3415
Nominal Comp BTU/hr	1970	1970	2661	2661	2661	2661	2450	2450	3690	3690



Professional Series Reach-In Dual Temp Refrigerator/Freezer Combos

Features

- Stainless steel interior and exterior
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil
- Ducted air distribution system for uniform cabinet temperature that eliminates “hot spots”
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high-grade 300 Series stainless steel



All units are 33.6" deep, (58.5" deep with doors open at 90°), and 82.5" high including 4" casters. (See chart for widths.) Optional 6" legs with stainless steel bullet feet. Electrical: 115V/60/1, voltage range: 104-126. Ambient temperature range: 45°-100° F. Refrigerant for refrigerators and freezers: R-404A. Refrigerator control set point range: +36° to +50° F. Freezer control set point range: -10° to +25° F.



	Refrigerator/Freezer Combos				
	RFH1-SSB-HSE	RFH2-SSB	RFH2-SSB-HD	RFH3-SSB	RFH3-SSB-HD
Interior volume (CF)	Refrigerator 9.1 ft ³ Freezer 10.5 ft ³	Refrigerator 22.3 ft ³ Freezer 22.3 ft ³	Refrigerator 22.3 ft ³ Freezer 22.3 ft ³	Refrigerator 48.0 ft ³ Freezer 22.3 ft ³	Refrigerator 48.0 ft ³ Freezer 22.3 ft ³
Width	27.5"	55"	55"	82.5"	82.5"
Depth with door open	58.5"	58.5"	58.5"	58.5"	58.5"
Interior door opening W	21.75"	21.75"	21.75"	21.75"	21.75"
Interior door opening H	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable shelves	3	6 (3 each)	6 (3 each)	Refrigerator 6, freezer 3	Refrigerator 6, freezer 3
Center shelves	N/A	N/A	N/A	Refrigerator 3, freezer 0	Refrigerator 3, freezer 0
Shelf size, W x D	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"
Amperage	9.5	17	17	20.6	20.6
Energy (kwh/day)	10.0	12.9	13.5	17.1	16.6
Heat rejection (BTU/hr)	1630	2580	2580	3035	3035
Nominal Comp BTU/hr	1135	1490(R) / 2671(F)	1490(R) / 2671(F)	1490(R) / 2671(F)	1490(R) / 2671(F)



Professional Series Reach-In Glass Door Refrigerators

Features

- Stainless steel interior and exterior
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil
- Ducted air distribution system for uniform cabinet temperature that eliminates “hot spots”
- Cabinet walls are foamed with R-134A CFC-free polyurethane foam
- Doors glass is triple pane, argon filled with Low-E non-reflective coating
- Cylinder door locks standard
- Variable speed compressor



All units are 33.6" deep, (58.5" deep with doors open at 90°), and 82.5" high including 4" casters. (See chart for widths.) Optional 6" legs with stainless steel bullet feet. Electrical: 115V/60/1, HACR breaker: 15.0, voltage range: 104-126. Ambient temperature range: 45°-100° F. Refrigerant for refrigerators and freezers: R-404A. Refrigerator control set point range: +36° to +50° F.

*Energy Star qualified.



	Glass Door Refrigerators					
	RH1-SSE-FG*	RH1-SSE-HG*	RH2-SSE-FG*	RH2-SSE-HG*	RH3-SSB-FG*	RH3-SSB-HG*
Interior volume (CF)	22.3 ft ³	22.3 ft ³	48.0 ft ³	48.0 ft ³	74.0 ft ³	73.6 ft ³
Width	27.5"	27.5"	55"	55"	82.5"	82.5"
Depth with door open	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
Interior door opening W	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior door opening H	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable shelves	3	3	6	6	9	9
Center shelves	N/A	N/A	3	3	6	6
Shelf size, W x D	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"
Amperage	4.3	4.3	6.0	6.0	11.8	14.0
Energy (kwh/day)	3.7	3.0	5.6	3.9	7.25	8.17
Heat rejection (BTU/hr)	655	655	981	981	2080	2080
Nominal Comp BTU/hr	1970	1970	2661	2661	5200	5200



Professional Series Pass-Thru Refrigerators

Features

- Stainless steel interior and exterior
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil
- Ducted air distribution system for uniform cabinet temperature that eliminates “hot spots”
- Cabinet walls (and solid door models) are foamed with R-134A CFC-free polyurethane foam
- Double pane heated glass doors
- Cylinder door locks standard
- Variable speed compressor



- HGHS = half glass front doors / half stainless back doors
- FGFG = full glass front doors / full glass back doors
- HGHG = half glass front doors / half glass back doors
- FSFS = full stainless front doors / full stainless back doors
- SHS = half stainless front doors / half stainless back doors

All units are 35.9" deep, (86" deep with all doors open at 90°), and 82.5" high including 4" casters. (See chart for widths.) Optional 6" legs with stainless steel bullet feet. Electrical: 115V/60/1, HACR breaker: 15.0, voltage range: 104-126. Ambient temperature range: 45°-100° F. Refrigerant for refrigerators and freezers: R-134A. Refrigerator control set point range: +36° to +50° F.




	Glass Door Refrigerators					Solid Door Refrigerators			
	PTR1SSE-HGHS	PTR1SSE-FGFG	PTR1SSE-HGHG	PTR2SSB-FGFG	PTR2SSB-HGHG	PTR1SSE-FSFS	PTR1SSE-HSHS	PTR2SSE-FSFS	PTR2SSE-HSHS
Interior volume (CF)	23.8 ft ³	23.8 ft ³	23.8 ft ³	51.3 ft ³	51.3 ft ³	23.8 ft ³	23.8 ft ³	51.3 ft ³	51.3 ft ³
Width	27.5"	27.5"	27.5"	55"	55"	27.5"	27.5"	55"	55"
Depth with door open	85.9"	85.9"	85.9"	85.9"	85.9"	85.9"	85.9"	85.9"	85.9"
Interior door opening W	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior door opening H	26.75"	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable shelves	3	3	3	6	6	3	3	6	6
Shelf size, W x D	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"	21.2 x 30.75"
Amperage	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
Energy (kwh/day)	4.5	4.4	4.5	8.8	8.8	4.2	4.3	3.9	3.9
Heat rejection (BTU/hr)	1025	1025	1025	2360	2360	830	830	1336	1336
Nominal Comp BTU/hr	1481	1481	1481	6226	6226	1481	1481	2085	2085

Refrigerators, Freezers, Coolers, Shelving



Professional Series Roll-In Refrigerators

Features

- Stainless steel interior and exterior
- Stainless steel ramp, stainless steel interior rack guides, and insulated stainless steel floor
- Cabinet will accept 72" tall rack (rack by others)
- Energy efficient thermostatic expansion valve self contained refrigeration system
- EverCheck digital control system with audio alarms 
- Entire cabinet is insulated with 2-3/8" foamed in place polyurethane
- Unique "ducted" air distribution system
- Self closing all stainless steel doors with locks
- Dual door frame heaters with energy saving on/off switch
- All metal torsion spring hinge design with stay open feature
- Exclusive "stepped" door design to protect recessed door gasket
- Flush mount door handles
- Field reversible doors (with accessory kit)
- Epoxy coated evaporator coil
- Hinged upper front panel for easy access to controller
- Removable, cleanable refrigeration system air filter
- Energy efficient automatic hot gas condensate evaporator

All units are 34.5" deep, (65" deep with doors open at 90°), and 90.6" high including 4" ramp. (See chart for widths.)
Electrical: 115V/60/1, HACR breaker: 15.0, voltage range: 104-126. Ambient temperature range: 45°-100° F. Refrigerant for refrigerators and freezers: R-404A. Refrigerator control set point range: +36° to +50° F.

Options: Door reversal kit, NAFEM Data Protocol connection (software by other vendors)



RIR2-SSB


	Roll-In Refrigerators	
	RIR1-SSB	RIR2-SSB
Interior volume (CF)	37.7 ft ³	72.66 ft ³
Width	35"	68"
Depth with door open	65"	65"
Interior door opening W	29.4"	29.4"
Interior door opening H	72.8"	72.8"
Rack capacity	1	2
Amperage	7.0	7.0
Energy (kwh/day)	5.5	8.3
Heat rejection (BTU/hr)	1135	1717
Nominal Comp BTU/hr	1490	1490

Refrigerators, Freezers, Coolers, Shelving



Professional Series Undercounter Refrigerators and Freezers

Features

- Stainless steel interior and exterior top, front, sides and bottom with galvanized back
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil 
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- 4" heavy duty casters, two with brakes

All units are 32.3" deep, and 33.9" high with 4" casters. (See chart for widths.) No center shelves. Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-100° F. Refrigerator control set point range: +21° to +53° F. Refrigerator refrigerant: R-134a. Freezer control set point range: -13° to +19° F. Freezer refrigerant: R-404A.

Options: additional epoxy shelves, 6" legs, 6" casters, tray pan rack slides (18" x 26" pans), bullnose top (front & rear), stainless steel back, one door in lieu of 2 drawers



HUR40A
HUF40A



HUR68A
HUF68A



HUR96A



HUR40A-D
HUF40A-D



HUR68A-D
HUF68A-D



HUR96A-D

	Refrigerators						Freezers			
	HUR40A	HUR68A	HUR96A	HUR40A-D	HUR68A-D	HUR96A-D	HUF40A	HUF68A	HUF40A-D	HUF68A-D
Interior volume (CF)	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Width	40.25"	68"	95.8"	40.25"	68"	95.8"	40.25"	68"	40.25"	68"
Depth, door/drawer open	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"	56.8"	56.8"	58.1"	58.1"
Interior door opening W	22.5"	22.5"	22.5"	N/A	N/A	N/A	22.5"	22.5"	N/A	N/A
Interior door opening H	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"	24.3"	24.3"	9.9"	9.9"
Adjustable shelves	1	2	3	N/A	N/A	N/A	1	2	N/A	N/A
Shelf size, W x D	22.4 x 24.6"	25 x 24.6"	25.9 x 24.6"	N/A	N/A	N/A	22.4 x 24.6"	25 x 24.6"	N/A	N/A
Amperage	5.0	5.0	6.0	5.0	5.0	6.0	5.8	9.3	5.5	10.0
Energy (kwh/day)	2.44	2.77	4.5	3.2	4.9	6.0	4.97	9.45	8.9	14.8
Heat rejection (BTU/hr)	449	638	740	449	695	852	1133	1565	1267	2104
Nominal Comp BTU/hr	1442	1442	2010	1442	1442	2010	1378	2466	1378	2466



Professional Series Worktop Refrigerators and Freezers

Features

- Stainless steel interior and exterior top, front, sides and bottom with galvanized back. Top includes 4" backsplash
- EverCheck® control center provides audio and visual signals alerting operators to clean filter and/or condenser coil
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- 6" heavy duty casters, two with brakes



All units are 32.3" deep, and 39.9" high with 6" casters. (See chart for widths.) No center shelves. Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-100° F. Refrigerator control set point range: +21° to +53° F. Refrigerator refrigerant: R-134a. Freezer control set point range: -13° to +19° F. Freezer refrigerant: R-404A.

Options: additional epoxy shelves, 6" legs, 4" casters, tray pan rack slides (18" x 26" pans), bullnose top (front & rear), stainless steel back, one door in lieu of 2 drawers



HWR40A
HWF40A



HWR68A
HWF68A



HWR96A



HWR40A-D
HWF40A-D



HWR68A-D
HWF68A-D



HWR96A-D

	Refrigerators						Freezers			
	HWR40A	HWR68A	HWR96A	HWR40A-D	HWR68A-D	HWR96A-D	HWF40A	HWF68A	HWF40A-D	HWF68A-D
Interior volume (CF)	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	29.1 ft ³	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Width	40.25"	68"	95.8"	40.25"	68"	95.8"	40.25"	68"	40.25"	68"
Depth, door/drawer open	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"	56.8"	56.8"	58.1"	58.1"
Interior door opening W	22.5"	22.5"	22.5"	N/A	N/A	N/A	22.5"	22.5"	N/A	N/A
Interior door opening H	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"	24.3"	24.3"	9.9"	9.9"
Adjustable shelves	1	2	3	N/A	N/A	N/A	1	2	N/A	N/A
Shelf size, W x D	22.4 x 24.6"	25 x 24.6"	25.9 x 24.6"	N/A	N/A	N/A	22.4 x 24.6"	25 x 24.6"	N/A	N/A
Amperage	5.0	5.0	6.0	5.0	5.0	6.0	5.5	10.0	5.5	10.0
Energy (kwh/day)	2.44	2.77	4.5	3.2	4.9	6.0	4.97	9.45	8.9	14.8
Heat rejection (BTU/hr)	449	638	740	449	695	852	1133	1708	1267	2104
Nominal Comp BTU/hr	1442	1442	2010	1442	1442	2010	1378	2592	1378	2592



Advanced Beverage Solutions
100 Gary Avenue, Suite C
Roselle, IL 60172

www.absone.com
E-mail: orders@absone.com

877-814-2271
Local: 847-524-1707
Fax: 847-524-1710

Professional Series Prep Tables



HPR46A



HPR72A



HPR46A-D



HPR72A-D

Features

- Stainless steel interior and exterior
- Raised rail is mechanically refrigerated and equipped with a 3/4" drain
- Low profile fans circulate refrigerated air in the rail to reduce energy consumption
- Rail is equipped with a one piece stainless steel cover
- Rail will accommodate 1/6th, 1/3rd, 1/2 or full size, 6" deep pans (pans and adapter bars by others)
- Cabinet and rail insulated with CFC free polyurethane
- Doors are self-closing, have locks
- Stepped door design protects magnetic door gaskets
- EverCheck controller monitors critical refrigeration functions
- Refrigeration system is equipped with solid state digital controls for base and rail
- Exclusive "night switch" allows overnight product storage in rail with cover closed
- Front breathing with Zero clearance requirements
- Hinged, louvered front panel for easy access to controller
- Removable, cleanable refrigeration system air filter
- Energy efficient automatic hot gas condensate evaporator
- 4" heavy duty platform casters (two with brakes)



Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-86° F. Refrigerator control set point range: -21° to +53°F. Refrigerant: R-404a.

Options: 6" legs, additional epoxy shelves, 1/2" polyurethane cutting board, 12" rail adapter bars, 2 drawers in lieu of 1 door

Refrigerators, Freezers, Coolers, Shelving

	Door Refrigerators		Drawer Refrigerators	
	HPR46A	HPR72A	HPR46A-D	HPR72A-D
Interior volume (CF)	8.5 ft ³	18.8 ft ³	8.5 ft ³	18.8 ft ³
Width	46"	72"	46"	72"
Depth, door/drawer open	56.8"	56.8"	58.1"	58.1"
Height (with casters)	44.8"	44.8"	44.8"	44.8"
Interior door/drawer opening W	22.5"	22.5"	22.5"	22.5"
Interior door/drawer opening H	24.3"	24.3"	9"	9"
Adjustable shelves, epoxy coated	1	2	N/A	N/A
Shelf size, W x D	22.4" x 24.6"	25.0" x 24.6"	N/A	N/A
Caster size	4"	4"	4"	4"
Amperage	7.6	12.8	7.6	13.6
Energy (kwh/day)	7.3	13.9	7.3	16
Heat rejection (BTU/hr)	1044	1976	1044	2275
Nominal Comp BTU/hr	4391	4391	4391	4391



Commercial Series Reach-In Refrigerators and Freezers

Features

- Stainless steel interior and exterior
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Refrigerant flow is controlled with a TXV expansion valve
Unique “ducted” air distribution system
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and doors are insulated with 2-3/8” of polyurethane
- Spring assisted self closing doors with stay open feature
- Field reversible doors (with optional kit)

All units are 33.6" deep, (59.6" deep with doors open at 90°), and 79.63" high including 4" casters. (See chart for widths.)
Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15.0 (HACR: 20.0 for 3 section units). Ambient temperature range: 45°-100°F. Refrigerant for refrigerators: R-134A. Refrigerator control set point range: +34° to +52° F. Refrigerant for freezers: R-404A. Freezer control set point range: -10° to +12° F. Left hand hinges available as special order. Options: door reversal kit, additional epoxy shelves, stainless steel shelves, combination universal tray/pan slides, foot pedal door opener, air filter.

*Energy Star qualified.



	Refrigerators						Freezers					
	CR1B-FS*	CR1B-HS*	CR2B-FS*	CR2B-HS*	CR3B-FS*	CR3B-HS*	CF1B-FS*	CF1B-HS*	CF2B-FS*	CF2B-HS*	CF3B-FS*	CF3B-HS*
Interior volume (CF)	23.3 ft ³	23.3 ft ³	51.0 ft ³	51.0 ft ³	74.3 ft ³	74.3 ft ³	23.3 ft ³	23.3 ft ³	51.0 ft ³	51.0 ft ³	74.3 ft ³	74.3 ft ³
Width	27.5"	27.5"	55"	55"	83"	83"	27.5"	27.5"	55"	55"	83"	83"
Depth with door open	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"
Interior door opening W	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"
Interior door opening H	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"
Adjustable shelves	3	3	6	6	9	9	3	3	6	6	9	9
Shelf size, W x D	21.25 x 26"	21.25 x 26"	23.9 x 24.6"	23.9 x 24.6"	23.9 x 24.6" 21.25 x 26"	23.9 x 24.6" 21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	21.25 x 26"	23.9 x 24.6" 21.25 x 26"	23.9 x 24.6" 21.25 x 26"
Amperage	3.7	3.7	7.0	7.0	12.0	12.0	9.5	9.5	11.1	11.1	16.0	16.0
Energy (kwh/day)	2.52	2.28	3.05	3.52	5.57	5.80	5.95	6.42	11.46	11.81	17.41	18.23
Heat rejection (BTU/hr)	450	450	866	866	866/450	866/450	1305	1305	2137	2137	2137/1305	2137/1305
Nominal Comp BTU/hr	1625	1625	2373	2373	2373/1625	2373/1625	2466	2466	3000	3000	3000/2466	3000/2466

Refrigerators, Freezers, Coolers, Shelving



Commercial Series Glass Door Refrigerators and Freezers

Features

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Refrigerant flow is controlled with a TXV expansion valve
- Unique “ducted” air distribution system
- Energy efficient fluorescent light with independent on/off switch
- Solid state controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet is insulated with 2-3/8” CFC free, foamed in place polyurethane
- Glass doors are energy efficient Multi Pane, Argon filled with Low-E non reflective coating and locks
- Self closing doors with stay open feature
- One piece, full length, chrome handle
- Field reversible doors (with optional kit)
- Enamel coated evaporator coil
- Automatic hot gas condensate evaporator with protective coating
- Anodized aluminum shelf supports

All units are 34.8" deep, (60.5" deep with doors open at 90°), and 79.63" high including 4" casters. (See chart for widths.) Electrical: 115V/60/1, voltage range: 104-126, HACR breaker: 15.0 (HACR: 20.0 for 3 section units). Ambient temperature range: 45°-100°F. Refrigerant for refrigerators: R-134A. Refrigerator control set point range: +34° to +52° F. Refrigerant for freezers: R-404A. Freezer control set point range: -10° to +12° F. Options: door reversal kit, additional epoxy shelves, stainless steel shelves, combination universal tray/pan slides, air filter.

*Energy Star qualified.



CR1B-FGY
CF1B-FG



CR2B-FGY
CF2B-FG



CR3B-FGY

	Refrigerators			Freezers	
	CR1B-FGY*	CR2B-FGY*	CR3B-FGY*	CF1B-FG*	CF2B-FG*
Interior volume (CF)	23.3 ft ³	51.0 ft ³	74.3 ft ³	23.3 ft ³	51.0 ft ³
Width	27.5"	55"	83"	27.5"	55"
Depth with door open	60.5"	60.5"	60.5"	60.5"	60.5"
Interior door opening W	22.8"	22.8"	22.8"	22.8"	22.8"
Interior door opening H	59.6"	59.6"	59.6"	59.6"	59.6"
Adjustable shelves	3	6	9	3	6
Shelf size, W x D	21.25 x 26"	23.9 x 24.6"	23.9 x 24.6" & 21.25 x 26"	21.25 x 26"	21.25 x 26"
Amperage	4.1	7.0	12.0	9.7	9.8
Energy (kwh/day)	3.12	4.97	8.65	8.68	13.73
Heat rejection (BTU/hr)	626	1137	1890	1493	1952
Nominal Comp BTU/hr	1625	2373	2373/1625	2466	3000



Commercial Series Undercounter Refrigerators and Freezers

Features

- Zero clearance sides and rear
- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors have 2" CFC free insulation
- Exclusive "stepped" door design to protect door gasket
- Spring assisted self-closing doors with stay open feature
- Field reversible doors
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Magnetic door gasket is easily removable for cleaning
- 4" heavy duty casters, two with brakes (HR24A has legs)

Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-100° F. Refrigerator control set point range: +20° to +52°F. Refrigerant: R-134a. Freezer control set point range: -10° to +10° F.

Factory installed cylinder door lock is available on 27" and 48" models as special order (add -01 to the end of the part number). Options: additional epoxy shelves, 2.25" casters to meet ADA, and 6" casters.

*Energy Star qualified.



Compact HR24A

CRMR27-LP
CRMF27-LP

CRMR48
CRMF48

CRMR60
CRMF60

CRMR72

HR24A approved for outdoor use.
CRMR27-LP and CRMF27-LP low profile units meet ADA requirements.

	Door Refrigerators						Door Freezers			
	HR24A*	CRMR27*	CRMR27-LP*	CRMR48*	CRMR60*	CRMR72*	CRMF27*	CRMF27-LP*	CRMF48*	CRMF60*
Interior volume (CF)	4.0 ft³	7.2 ft³	7.2 ft³	13.66 ft³	17.55 ft³	21.25 ft³	7.2 ft³	7.2 ft³	13.66 ft³	17.55 ft³
Width	23.4"	27"	27"	48"	60"	72"	27"	27"	48"	60"
Depth	24.5"	30"	30"	30"	30"	30"	30"	30"	30"	30"
Depth, door open	46.4"	54.5"	54.5"	51.5"	57.5"	51.5"	54.5"	54.5"	51.5"	57.5"
Height (with casters)	32.7"	33.63"	32.3"	33.63"	33.63"	33.63"	33.63"	32.3"	33.63"	33.63"
Interior door opening W	19.2"	22.6"	22.6"	19.5"	25.5"	19.5"	22.6"	22.6"	19.5"	25.5"
Interior door opening H		22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
Adjustable shelves	3	1	1	2	2	3	1	1	2	2
Shelf size, W x D	(1) 19" x 17" (2) 19" x 12"	22" x 16"	22" x 16"	21.3" x 16"	27.3" x 15.9"	22" x 15.9"	22" x 16"	22" x 16"	21.3" x 16"	27.3" x 15.9"
Caster size	Legs	4"	2.25"	4"	4"	4"	4"	2.25"	4"	4"
Amperage	2.0	2.6	2.6	2.6	4.2	4.2	3.4	3.4	6.0	6.0
Energy (kwh/day)	0.378	.65	.65	1.44	2.15	2.84	2.66	2.66	4.34	4.86
Heat rejection (BTU/hr)	N/A	180	180	327	414	539	442	442	820	821
Nominal Comp BTU/hr	N/A	1029	1029	1029	1386	1386	841	841	1527	1527

Refrigerators, Freezers, Coolers, Shelving



Commercial Series Undercounter and Worktop Refrigerators and Freezers with Drawers

Features

- Zero clearance sides and rear
- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- Front breathing air flow design
- Stainless steel exterior drawer with ABS interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Drawer slides are constructed of 16 gauge stainless steel with acetal rollers
- Magnetic door gasket is easily removable for cleaning
- 4" heavy duty casters, two with brakes
- Automatic defrost

Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-100° F. Refrigerator control set point range: +20° to +52°F. Refrigerant: R-134a. Freezer control set point range: -18° to +10° F.

Options: 2.25" casters to meet ADA, different size casters, 6" legs, stainless steel back.

Worktop refrigerators and freezers part numbers end in -WD.



CRMR27-D
CRMF27-D



CRMR48-D



CRMR27-WD
CRMF27-WD



CRMR48-WD4

	Drawer Refrigerators				Drawer Freezers	
	CRMR27-D	CRMR48-D4	CRMR27-WD	CRMR48-WD4	CRMF27-D	CRMF27-WD
Interior volume (CF)	7.2 ft ³	13.66 ft ³	7.2 ft ³	13.66 ft ³	7.2 ft ³	7.2 ft ³
Width	27"	48"	27"	48"	27"	27"
Depth	30"	30"	30"	30"	30"	30"
Depth, drawer open	43.25"	43.25"	43.25"	43.25"	43.25"	43.25"
Height (with casters)	33.63"	33.63"	40"	40"	33.63"	40"
Drawer opening W	22.6"	19.5"	22.6"	19.5"	22.6"	22.6"
Drawer opening H	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
Caster size	4"	4"	6"	6"	4"	6"
Amperage	2.6	2.6	2.6	2.6	3.4	3.4
Energy (kwh/day)	1.4	2.3	1.4	2.3	3.9	3.9
Heat rejection (BTU/hr)	202.8	327	202.8	327	560	560
Nominal Comp BTU/hr	1029	1029	1029	1029	841	841



Commercial Series Worktop Refrigerators and Freezers

Features

- Zero clearance sides and rear
- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors have 2" CFC free insulation
- Exclusive "stepped" door design to protect door gasket
- Spring assisted self-closing doors with stay open feature
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Field reversible doors
- Magnetic door gasket is easily removable for cleaning
- 6" heavy duty casters, two with brakes

Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-100° F. Refrigerator control set point range: +20° to +52°F. Refrigerant: R-134a. Freezer control set point range: -10° to +10° F.

Factory installed cylinder door lock is available on 27" and 48" models as special order (add -01 to the end of the part number). Options: additional epoxy shelves, 2.25" casters to meet ADA, and 4" casters.

*Energy Star qualified.



CRMR27-W
CRMF27-W



CRMR48-W
CRMF48-W



CRMR72-W

	Door Refrigerators				Door Freezers		
	CRMR27-W*	CRMR48-W*	CRMR60-W*	CRMR72-W*	CRMF27-W*	CRMF48-W*	CRMF60-W*
Interior volume (CF)	7.2 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³	7.2 ft ³	13.66 ft ³	17.55 ft ³
Width	27"	48"	60"	72"	27"	48"	60"
Depth	30"	30"	30"	30"	30"	30"	30"
Depth, door open	54.5"	51.5"	57.5"	51.5"	54.5"	51.5"	57.5"
Height (with casters)	40"	40"	40"	40"	40"	40"	40"
Interior door opening W	22.6"	19.5"	25.5"	19.5"	22.6"	19.5"	25.5"
Interior door opening H	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
Adjustable shelves	1	2	2	3	1	2	2
Shelf size, W x D	22.8" x 16"	21.3" x 16"	27.3" x 15.9"	22.0" x 15.9"	22.8" x 16"	21.3" x 16"	27.3" x 15.9"
Caster size	6"	6"	6"	6"	6"	6"	6"
Amperage	2.6	2.6	4.2	4.2	3.4	6.0	6.0
Energy (kwh/day)	.65	1.44	2.15	2.84	2.66	4.34	4.86
Heat rejection (BTU/hr)	180	327	414	539	442	820	821
Nominal Comp BTU/hr	1029	1029	1386	1386	841	1527	1527



Commercial Series Sandwich Top and Mega Top Refrigerators (continued on next page)

Exclusive design distributes cold air through a system of ducts and louvers positioned throughout the cabinet. Constant air movement circulates top to bottom... surrounding the food with perfect, uniform temperatures.

Sandwich Tops have two rows of 4" deep 1/6 size pans, a smaller hood, and the 10" deep white polyethylene cutting board mounts flush with the front of the refrigerator.

Mega Tops have three rows of 4" deep 1/6 size pans, a larger hood, and the 8" deep white polyethylene cutting board extends approximately 4.6" beyond the front of the refrigerator.

The pan capacity, hood size, and depth (due to position and size of the cutting board) are the only differences between the Sandwich Top and Mega Top refrigerators. All other specifications are the same.



Features

- Zero clearance sides and rear
- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors have 2" CFC free insulation
- Exclusive "stepped" door design to protect door gasket
- Spring assisted self-closing doors with stay open feature
- Anodized aluminum shelf supports adjustable in 1/2" increments
- Field reversible doors
- Magnetic door gasket is easily removable for cleaning
- Front breathing air flow design
- Innovative air distribution duct (patent pending) distributes air evenly to maintain product temperature
- Full complement of polycarbonate plastic pans 4" deep
- 1/2" thick full length white polyethylene cutting board is the full width of the cabinet
- 6" heavy duty casters, two with brakes

	Door Refrigerators					
Sandwich Top	CRMR27-8	CRMR48-8	CRMR48-12	CRMR60-8	CRMR60-12	CRMR60-16
Pan capacity (# and size)	8, 1/6 x 4"D	8, 1/6 x 4"D	12, 1/6 x 4"D	8, 1/6 x 4"D	12, 1/6 x 4"D	16, 1/6 x 4"D
Sandwich Top depth	30"	30"	30"	30"	30"	30"
Mega Top	CRMR27-12M	CRMR48-12M	CRMR48-18	CRMR60-12M	CRMR60-18M	CRMR60-24M
Pan capacity (# and size)	12, 1/6 x 4"D	12, 1/6 x 4"D	18, 1/6 x 4"D	12, 1/6 x 4"D	18, 1/6 x 4"D	24, 1/6 x 4"D
Mega Top depth	35.3"	35.3"	35.3"	35.3"	35.3"	35.3"
Interior volume (CF)	7.2 ft ³	13.66 ft ³	13.66 ft ³	16.6 ft ³	16.6 ft ³	16.6 ft ³
Width	27"	48"	48"	60"	60"	60"
Depth, door open	54.5"	51.5"	51.5"	51.5"	51.5"	51.5"
Height (with casters)	45.2"	45.2"	45.2"	45.2"	45.2"	45.2"
Interior door opening W	22.6"	19.5"	19.5"	25.5"	25.5"	25.5"
Interior door opening H	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
Adjustable shelves	1	2	2	2	2	2
Shelf size, W x D	22" x 16"	21.3" x 16"	21.3" x 16"	22" x 15.9"	22" x 15.9"	22" x 15.9"
Caster size	6"	6"	6"	6"	6"	6"
Amperage	2.6	2.9	2.9	5.5	5.5	5.5
Energy (kwh/day)	3.8	4.0	4.0	4.2	4.2	4.2
Heat rejection (BTU/hr)	540	567	567	596.5	596.5	596.5
Nominal Comp BTU/hr	1029	1029	1029	2607	2607	2607



Commercial Series Sandwich Top and Mega Top Refrigerators (continued from previous page)

Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-86° F. Refrigerator control set point range: +20° to +52°F. Refrigerant: R-134a.

Options: additional epoxy shelves, 2" casters, 4" casters, 6" legs, flat lift off stainless steel cover, stainless steel back, and large pan adapter bars.



Mega Top
CRMR72-18M-24M-30M



Sandwich Top
CRMR72-12-16-18



CRMR27-8



CRMR27-8D



CRMR48-8-12



CRMR48-12D4

	Door Refrigerators			Drawer Refrigerators	
Sandwich Top	CRMR72-12	CRMR72-16	CRMR72-18	CRMR27-8D	CRMR48-12D4
Pan capacity (# and size)	12, 1/6 x 4"D	16, 1/6 x 4"D	18, 1/6 x 4"D	8, 1/6 x 4"D	12, 1/6 x 4"D
Sandwich Top depth	30"	30"	30"	30"	30"
Mega Top	CRMR72-18M	CRMR72-24M	CRMR72-30M	N/A	N/A
Pan capacity (# and size)	18, 1/6 x 4"D	24, 1/6 x 4"D	32, 1/6 x 4"D	N/A	N/A
Mega Top depth	35.3"	35.3"	35.3"	N/A	N/A
Interior volume (CF)	19.7 ft ³	19.7 ft ³	19.7 ft ³	7.2 ft ³	13.66 ft ³
Width	72"	72"	72"	27"	48"
Depth, door/drawer open	51.5"	51.5"	51.5"	43.25"	43.25"
Height (with casters)	45.2"	45.2"	45.2"	45.2"	45.2"
Door/drawer opening W	19.5"	19.5"	19.5"	22.6"	19.5"
Door/drawer opening H	22.9"	22.9"	22.9"	22.9"	22.9"
Adjustable shelves	3	3	3	N/A	N/A
Shelf size, W x D	22" x 15.9"	22" x 15.9"	22" x 15.9"	N/A	N/A
Caster size	6"	6"	6"	6"	6"
Amperage	5.5	5.5	5.5	2.6	2.9
Energy (kwh/day)	6.41	6.41	6.41	1.6	4.0
Heat rejection (BTU/hr)	911	911	911	230	567
Nominal Comp BTU/hr	2607	2607	2607	1029	1029



Commercial Series Pizza Prep Refrigerators



CPT46



CPT67



CPT93

Features

- Stainless steel exterior front, sides and top
- Anodized aluminum interior sides and back with stainless steel interior floor
- Stainless steel exterior door with ABS interior liner
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Rail utilizes a unique ducted air distribution system to distribute air evenly and maintain product temperature
- Exclusive "stepped" door design to protect door gasket
- Spring assisted self-closing doors with stay open feature
- Extruded aluminum flush mount door handle
- Field reversible doors
- Front breathing air flow design
- Full complement of polycarbonate plastic 1/3rd size pans, 4" deep, and adapter bars
- 46" x 19" x 1/2" thick white polyethylene cutting board
- Enamel coated evaporator coil
- Anodized aluminum shelf supports adjustable in 1/2" increments
- 6" heavy duty casters, two with brakes


Electrical: 115V/60/1, NEMA plug 5-15P, voltage range: 104-126, HACR breaker: 15.0. Ambient temperature range: 45°-86° F. Refrigerator control set point range: +28° to +45°F. Refrigerant: R-134a.

Options: 6" legs, additional epoxy shelves, divider bars


	Door Refrigerators		
	CPT46	CPT67	CPT93
Interior volume (CF)	11.0 ft ³	19.9 ft ³	30.1 ft ³
Width	46"	67"	93"
Depth with cutting board installed	36.17"	36.17"	36.17"
Depth, door open	57.71"	57.71"	57.71"
Height (with casters)	43.45"	43.45"	43.45"
Interior door opening W	22.59"	22.59"	22.59"
Interior door opening H	22.92"	22.92"	22.92"
Adjustable shelves, epoxy coated	2	4	6
Shelf size, W x D	22.0" x 15.9"	24.8" x 25.61"	24.8" x 25.61"
Pan capacity (# and size)	6, 1/3 x 4"D	9, 1/3 x 4"D	12, 1/3 x 4"D
Caster size	6"	6"	6"
Amperage	3.5	5.5	5.5
Energy (kwh/day)	3.2	5.0	5.5
Heat rejection (BTU/hr)	454	778	775.3
Nominal Comp BTU/hr	1386	2607	2607




Professional Series Accessories




Caster with brake

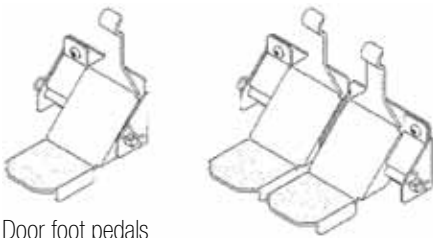


Door foot pedals

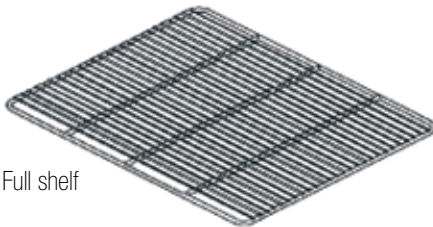

Full shelf

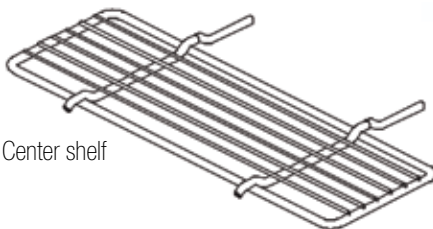

Center shelf

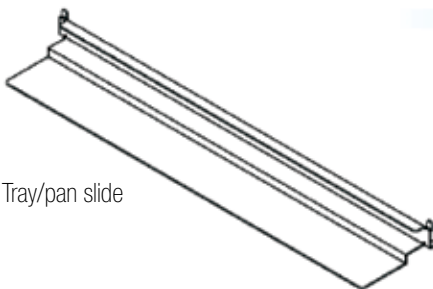


Tray/pan slide

Part Number	Description
HS-3546	4" Casters (set of four, two with brakes)
HS-3547	4" Casters (set of six, three with brakes) 3 section SSB reach-ins only
HS-3511	6" Legs (set of two) 3 section uprights only
HS-3512	6" Legs (set of four) 1 / 2 / 3 section uprights
HS-3712	2.8" Casters (set of four, two with brakes) 1 and 2 section undercounters
HS-3713	2.8" Casters (set of six, three with brakes) 3 section undercounters
HS-3719	6" Casters (set of four, two with brakes) 1 and 2 section undercounters
HS-3720	6" Casters (set of six, three with brakes) 3 section undercounters
HS-3513	One door foot pedal
HS-3514	Two door foot pedal
HS-3527	Door reversal kit, full door (right to left)
HS-3528	Door reversal kit, full door (left to right)
HS-3529	Door reversal kit, half door (right to left)
HS-3530	Door reversal kit, half door (left to right)
HS-3507	Standard epoxy shelf
HS-3502	Stainless steel shelf
HS-3551	Epoxy shelf (for all pass-thru units)
HS-3553	Stainless steel shelf (PTRX-SSB pass-thru)
HS-3561	Epoxy shelf (2 or 3 section undercounter)
HS-3563	Epoxy shelf (1 section undercounter)
HS-3559	Undercounter tray/pan rack slides, accomodates (7) 18" x 26" pans
HS-3509	Epoxy center shelf (SSB/SSE only)
HS-3504	Stainless steel center shelf (SSB/SSE only)
HS-3557	Stainless steel bottom support combination pan slides (1 set)*
HS-3558	Stainless steel bottom support combination pan slides (4 sets)*
HS-3531	Padlock hasp for two section uprights
HS-3543	Padlock hasp for one section (hinged left)
HS-3544	Padlock hasp for one section (hinged right)
HS-4009	12" Rail adapter bar, prep table
HS-4007	Drawer assembly divider bars, prep table (1/3 and 1/6 size pans)
HS-4010	46" X 16" x 1/2" cutting board for prep table
HS-4011	72" X 16" x 1/2" cutting board for prep table
HS-3706	Stainless steel rack 40" long for undercounter (special order)
HS-3707	Stainless steel rack 68" long for undercounter (special order)
HS-3708	Stainless steel rack 96" long for undercounter (special order)
HS-3709	Stainless steel back 40" long for worktop (special order)
HS-3710	Stainless steel back 68" long for worktop (special order)
HS-3711	Stainless steel back 96" long for worktop (special order)
HS-4511	Double sided bull nose top 40" long for undercounter & worktop
HS-4512	Double sided bull nose top 68" long for undercounter & worktop
HS-4513	Double sided bull nose top 96" long for undercounter & worktop
HS-3575	Remote monitoring control board, NAFEM data protocol (special order, factory install)

*Tray/Pan slides: 16 sets on 3" centers per section is the recommended maximum capacity for uprights. Units can hold as many as 24 sets on 2" centers per section. Tray/Pan slides accommodate one Baker Pan: Width 17-7/8" to 18" x Length 25-3/4" to 26-7/8", or two Hotel Pans: Width 12-7/8" to 13" x Length 20-3/4" to 20-7/8".




Commercial Series Accessories




Caster with brake




Door foot pedals



Full shelf

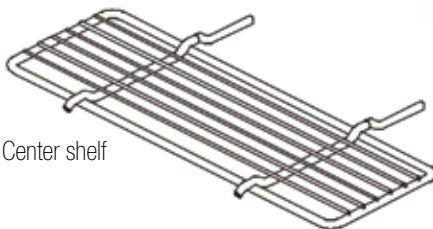

Center shelf

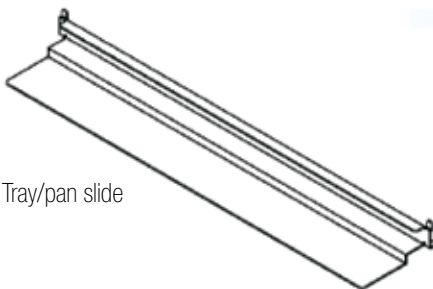

Tray/pan slide

Part Number Description

HS-3714	6" Legs (set of four) 1 and 2 section uprights
HS-3715	6" Legs (set of six) 3 section uprights
HS-5035	4" Casters (set of four, two with brakes) 1, 2 & 3 section horizontal units
HS-5036	6" Casters (set of four, two with brakes) 1, 2 & 3 section horizontal units
HS-5037	2.25" Casters (set of four, two with brakes) ADA 1 & 2 section undercounters
HS-5066	6" Legs (set of four) undercounters
HS-3721	One door foot pedal, left hand hinge
HS-3722	One door foot pedal, right hand hinge
HS-3722	Two door foot pedal
HS-3725	Door reversal kit, full and half SS door, right to left
HS-3726	Door reversal kit, full and half SS door, left to right
HS-5045	Door reversal kit, full glass door, right to left
HS-5046	Door reversal kit, full glass door, left to right
HS-5052	Industrial strength epoxy shelf, 1 & 3 section uprights
HS-5053	Industrial strength epoxy shelf, 3 each, 1 & 3 section uprights
HS-5054	Industrial strength SS shelf, 1 & 3 section uprights
HS-5047	Industrial strength epoxy shelf, 2 & 3 section uprights
HS-5048	Industrial strength epoxy shelf, 3 each, 2 & 3 section uprights
HS-5049	Industrial strength SS shelf, 2 & 3 section uprights
HS-3502	Stainless steel shelf, 1 section upright
HS-5116	Stainless steel shelf, all 27" and 72" undercounters, worktops and prep tables
HS-5058	Epoxy shelf, all 27" and 72" undercounters, worktops and prep tables
HS-5059	Epoxy shelf, all 48" undercounters, worktops and prep tables
HS-5108	Epoxy shelf, all 60" undercounters, worktops and prep tables
HS-3557	Stainless steel bottom support combination pan slides (1 set)*
HS-3558	Stainless steel bottom support combination pan slides (4 sets)*
HS-5027	Pan slide shelf supports (2 section, one required per section)
HS-5007	Air filter, 1 section
HS-5008	Air filter, 2 section
HS-5009	Air filter, 3 section
HS-5112	Stacking kit for CRMR27 & CRMF27
HS-5067	Mega Top rail adapter bar, 20" x 1.0" front to back
HS-5068	Sandwich Top rail adapter bar, 13.7" x 1.0" left to right
HS-5069	Sandwich Top rail adapter bar, 12.6" x 1.0" front to back
HS-5070	Stainless steel lift-off cover, 12 pan, Mega Top opening
HS-5071	Stainless steel lift-off cover, 18 pan, Mega Top opening
HS-5072	Stainless steel lift-off cover, CRMR27-8
HS-5073	Stainless steel lift-off cover, CRMR48-8
HS-5074	Stainless steel lift-off cover, 12 pan, Sandwich Top opening
HS-5106	Stainless steel lift-off cover, CRMR60-16 & CRMR72-16
HS-5107	Stainless steel lift-off cover, CRMR72-18
HS-5075	Stainless back, 27" horizontal units (factory install only)
HS-5076	Stainless back, 48" horizontal units (factory install only)
HS-5085	Stainless back, 60" horizontal units (factory install only)
HS-5086	Stainless back, 72" horizontal units (factory install only)

*Tray/Pan slides: 16 sets on 3" centers per section is the recommended maximum capacity for uprights. Units can hold as many as 24 sets on 2" centers per section. Tray/Pan slides accommodate one Baker Pan: Width 17-7/8" to 18" x Length 25-3/4" to 26-7/8", or two Hotel Pans: Width 12-7/8" to 13" x Length 20-3/4" to 20-7/8".



www.advancedbeveragesolutions.fastcooler.com

Your One-Stop Source for Walk-In Coolers!

This website has all the information you'll need to make an informed and intelligent decision when selecting a walk-in cooler:

- Buyer's Guide
- Online video and pdf Installation Guide
- *Cooler Connection*, the coolest blog in the Foodservice Industry!
- FAQ's
- E-mail link to ask specific questions
- Information about the manufacturer, U.S. Cooler
- Online purchasing 24-7

Here's a sample of what you'll find in our Buyer's Guide...

When making a decision which walk-in cooler or freezer to buy there are many things that must be considered. Our online Buyer's Guide will help you go through all these considerations...

WHAT IS IMPORTANT TO YOU

MATERIALS

INSULATION MATERIALS

1. Extruded Polystyrene
2. Polyurethane

METAL SKINS

1. G 90 Galvanized
2. Aluminum
3. Galvalume
4. Painted G90 Galvanized
5. Stainless Steel

REFRIGERATION SYSTEMS

1. Remote Systems
2. Pre-assembled Remote Systems
3. Standard Top Mount
4. Side Mount Refrigeration System
5. Saddle Mount Refrigeration System
6. Penthouse Refrigeration System
7. Roll Up Refrigeration System

OUTDOOR APPLICATIONS

WALK-IN COOLERS AND FREEZERS WITHOUT A FLOOR

MANUFACTURER

CONCLUSION

Cooler Connection, the coolest blog in the Foodservice Industry, will keep you informed with the latest cooler news: new products, preventative maintenance and fix-it tips, fact versus fiction information, "heads-up" information such as new U.S. Department of Energy (DOE) rulings, cooler parts and accessories, and much more!



Walk-in cooler



5' x 7' Brew Cave



Refrigerators, Freezers, Coolers, Shelving



Advanced Beverage Solutions
100 Gary Avenue, Suite C
Roselle, IL 60172

www.absone.com
E-mail: orders@absone.com

877-814-2271
Local: 847-524-1707
Fax: 847-524-1710

Cooler and Freezer Shelving

Wire shelving is epoxy coated for durability and pleasing appearance. Posts are grooved at 1" increments, numbered at 2" increments, and double grooved every 8" for easy identification. *Note: for mobile post use the prefix "FGN"

Plastic split sleeves are slightly wedge-shaped and hold each corner of the shelf in its proper place on the post. Four sets (2 pieces per set) of split sleeves are needed to secure each shelf to each corner post. The appropriate number of split sleeves are included with new shelving units. Replacement split sleeves: Part # AM.


S-hooks are used to "add-on" shelving units with only two posts required. Part # 93333GN



Posts are grooved at 1" increments



Split sleeves fit into grooves to keep shelves level

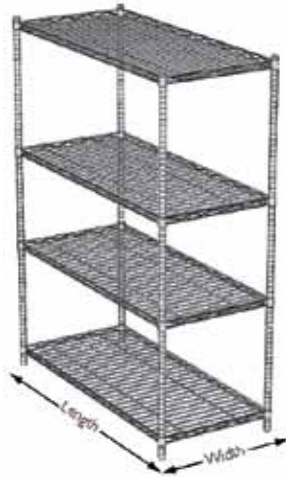

Shelving Posts

Part #	Length"	Weight
FG007G	7	0.5 lbs
FG013G	13	1 lbs
FG033G	33	2 lbs
FG054G	54	3 lbs
FG063G	63	3.5 lbs
FG074G	74	4 lbs
FG086G	86	5 lbs

Part Number	Width"	Length"	Weight lbs.
FF1236GN	12	36	7
FF1248GN	12	48	9
FF1260GN	12	60	13
FF1424G	14	24	6
FF1430G	14	30	7
FF1436G	14	36	8
FF1442G	14	42	9.5
FF1448G	14	48	10.5
FF1460G	14	60	14
FF1472G	14	72	17
FF1824G	18	24	7
FF1830G	18	30	8
FF1836G	18	36	9.5
FF1842G	18	42	11
FF1848G	18	48	12
FF1854G	18	54	14.5
FF1860G	18	60	17
FF1872G	18	72	20
FF2124G	21	24	8
FF2130G	21	30	9
FF2136G	21	36	11
FF2142G	21	42	12
FF2148G	21	48	14
FF2154G	21	54	16
FF2160G	21	60	18
FF2172G	21	72	24
FF2424G	24	24	9
FF2430G	24	30	11
FF2436G	24	36	13
FF2442G	24	42	15
FF2448G	24	48	16
FF2454G	24	54	18
FF2460G	24	60	21
FF2472G	24	72	26

Accessories



Part Number	93333GN	CA5SBR	AP	AF	AG	APL	AM
Description	S hook for add-ons	Caster set, includes two locking casters	Post cap	Foot plate	Non-marring floor glide	Locking post collar	Split sleeves, set of four

EverCheck® is a registered trademarks of Hoshizaki America, Inc., Peachtree City, Georgia.

ENERGY STAR is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy helping us all save money and protect the environment through energy efficient products and practices.

Refrigerators, Freezers, Coolers, Shelving